



NOTE
 DRIVE TUBE IS SHOWN LONG
 CUT TO LENGTH AND FIT
 DRIVE FITTING AS SHOWN
 ON ASSY OF WING TO FUSELAGE


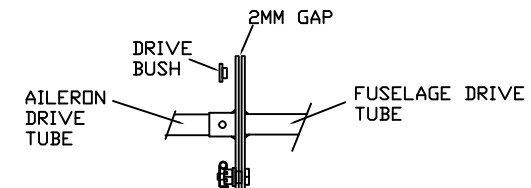


BOLT TOGETHER
 WITH 1/4 HT BOLT
 & CASTLE NUT
 TIGHTEN AND SECURE
 WITH A SPRING PIN


ATTACHMENT OF TORQUE TUBE
 TO FUSELAGE DRIVE FITTING

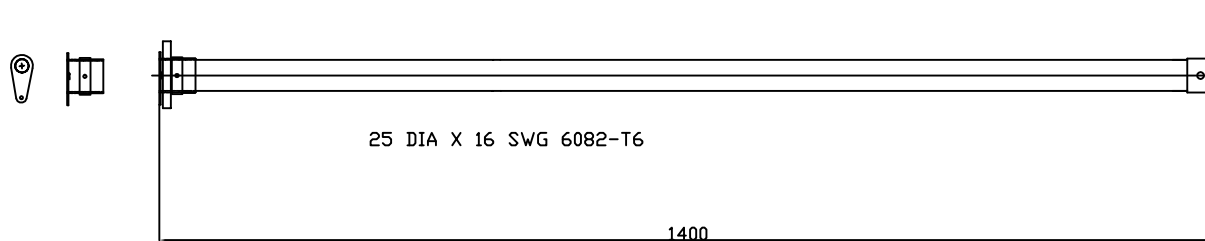

TUFNOL OUTER BEARING

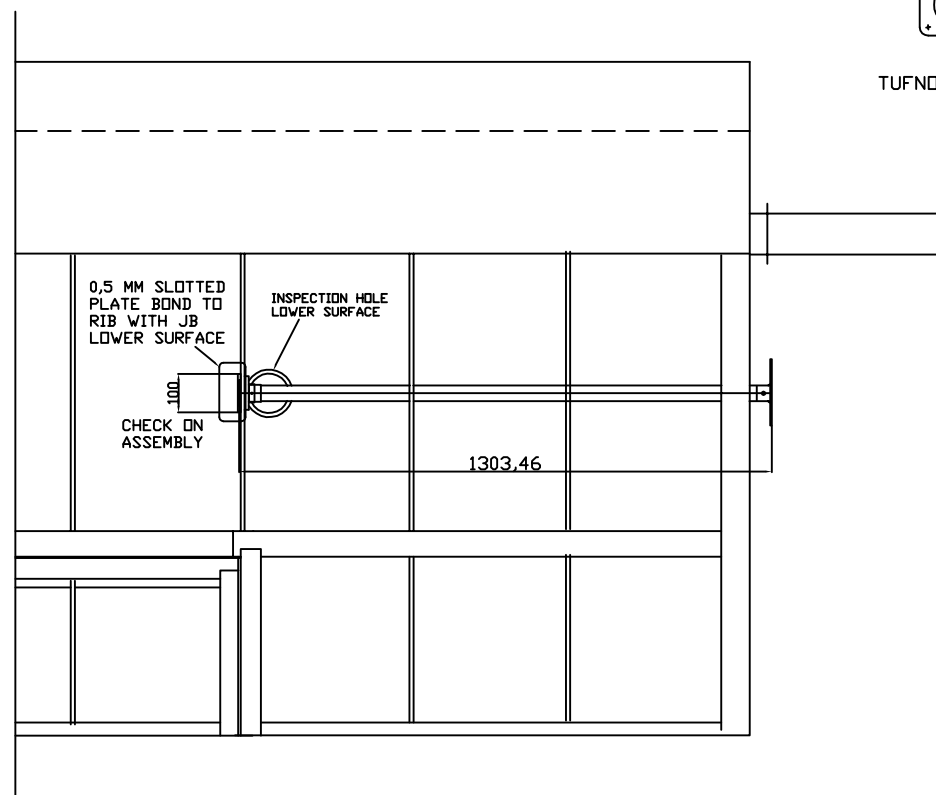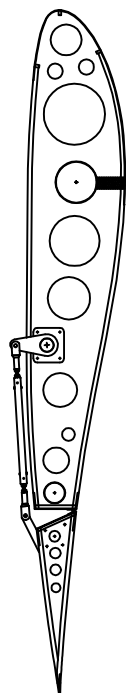

REINFORCE BOTH SIDES
 OF RIB SHEAR WEB
 WITH 1 LAM OF
 300G WOVEN ROVING
 AS SHOWN

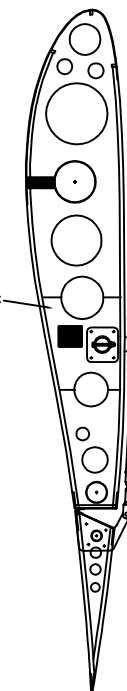

MW9B-47
 ELEVON DRIVE TUBE ASSY