

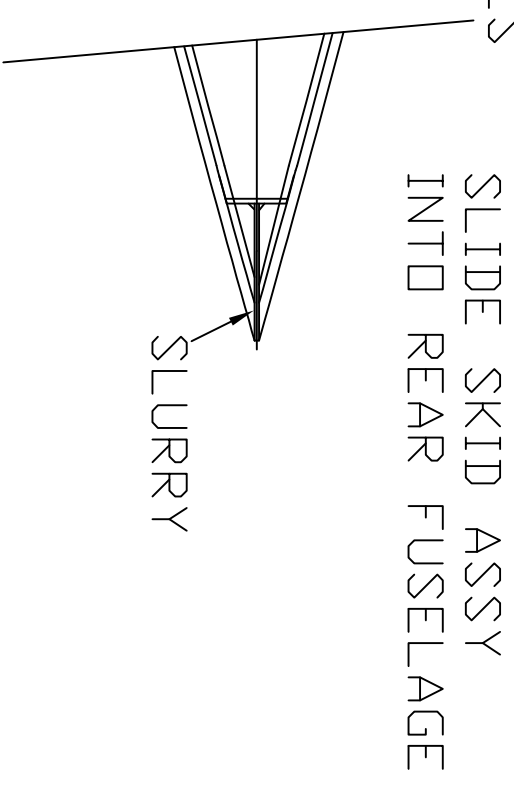


A

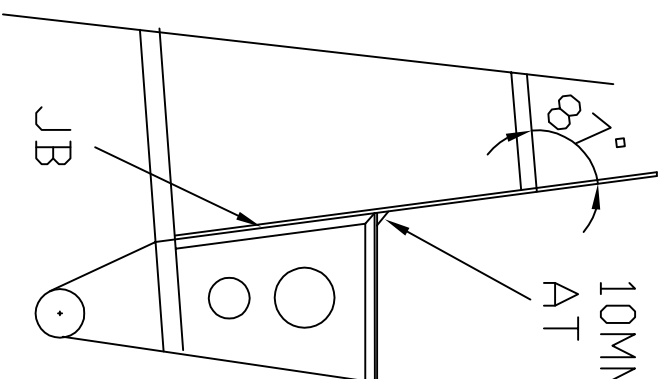

TOP OF  
CUT OUT  
3MM BIRCH PLY

LIGHTLY FLEX NACELLE SIDES APART  
APPLY JB ADHESIVE TO CONTACT SURFACES  
SLIDE SKID ASSY INTO POSITION  
APPLY LIGHT PRESSURE TO NACELLE SIDES  
UNTIL SET  
WIPE OFF EXCESS OR FORM INTO A FILLET

MW9B-8  
REAR BLKHD & SKID 2