



A


WING TORQUE TUBE



M5 BOLT
ALL FITTINGS




INBOARD DRIVE FITTINGS
2 OFF EACH




DRIVE BUSH
4 OFF MS


TO PREVENT THE FITTING
FROM BEING STRAINED AS
THE WING FLEXES INSERT
OVER LENGTH BUSH AND
BOLT UP HARD AGAINST
TORQUE TUBE FLANGE
SECURE WITH A SPRING CLIP



M6 BOLT &
CASTLE NUT




ANGLE FITTING AS
SHOWN ON DRG 53



WELD JOINT
ALL ROUND
THIS FACE


ELEVON
DRIVE TUBE




TACK WELD
LOCALLY AS
SHOWN 2 PLACES

WELDING NOTES APPLY
TO ALL FITTINGS

BUSH TO BE A
SNUG FIT IN TUBE
LOCK WITH 2 ALLY
POP RIVETS

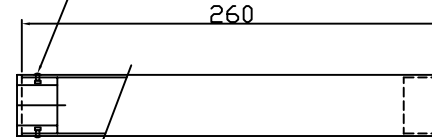


ELEVON PIVOT TUBE
38X1.6 6082T6
2 OFF





BUSH NYLATRON
4 OFF


CHAMFER ALL
BUSHES AS
SHOWN
TO CLEAR WELD



BEARING BLOCK
2 OFF
16 THICK TUFNOL CARP




FIT BEARING
BLOCK IN RIB
HOLE
SECURE WITH
4-M5 BOLTS



16SWG S514
ALL LEVERS
LAS AEROSPACE

DRILL 1/4"

OUTBOARD LEVER
2 OFF



25 DIA BORE
1.5 WALL
MS TUBE

BEARING
BLOCK

DRILL ASSY THROUGH
FROM COLLAR ON ASSY
LOCATE WITH A CLOSE FITTING M5 BOLT

TORQUE TUBE



LOCATION COLLAR
2 OFF
MAKE FROM 1.5 MS TUBE
SEE NOTES FOR DETAILS

MS LEVER ATTACHMENT TUBES
38 DIA X 1.5 1 5/8" X 1/16"
28 DIA X 1.5 1 1/8" X 1/16"

LOOK IN E BAY, EVERY EXHAUST PART LTD
OR AMAZON SHORT LENGTHS AVAILABLE

MW9B-48
CONTROL COMPONENTS