



A

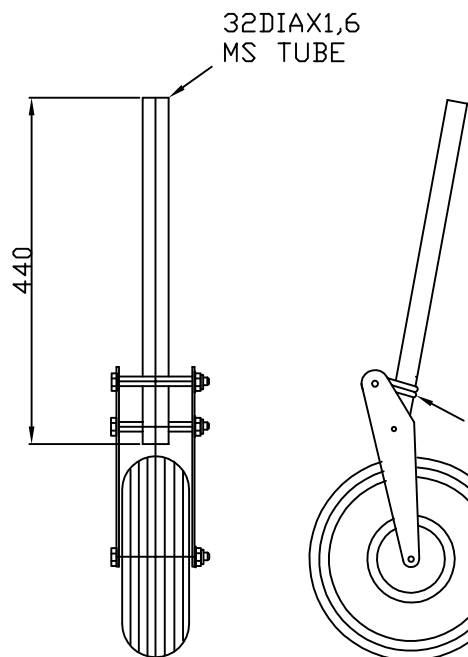


32 DIA X 1.6
MS TUBE

2 WRAPS OF
8MM BUNGEE




ALUMINIUM BUSH
BOTH ENDS
DRILL 8 DIA


AXLE 20 DIA X 1.6
M STEEL
MAKE TO SUIT WHEEL USED



BEARING BLOCK
2 OFF 25MM
TUFNOL CARP

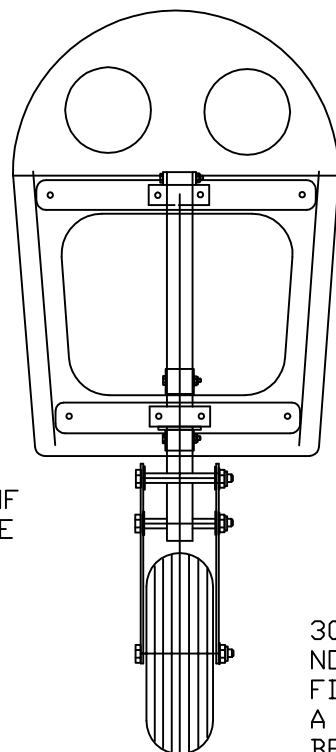


300X4 PLASTIC
NOSE WHEEL
FITTED WITH
A ROLLER
BEARING

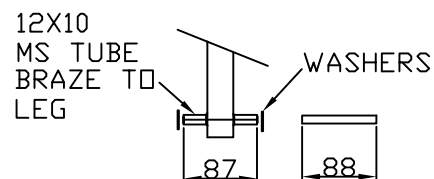


12X10
MS TUBE
BRAZE TO
LEG

WASHERS

PIVOT TUBE
10X8 MS
TO ROTATE IN
CROSS TUBE

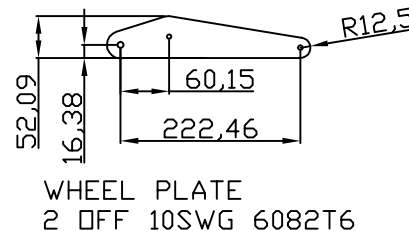


WHEEL PLATE
2 OFF 10SWG 6082T6




35X1.5
MS TUBE

WELD
TOP LOCATION
COLLAR




WELD
M5 BOLT
35X1.5
MS TUBE

LOWER LOCATION
COLLAR

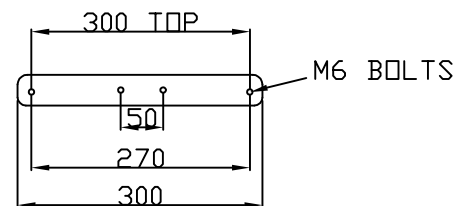

STIFFENER STRAP 10 SWG 6082T6

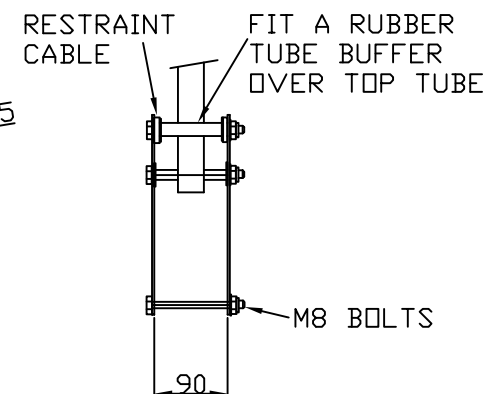

RESTRAINT
CABLE

FIT A RUBBER
TUBE BUFFER
OVER TOP TUBE

M8 BOLTS



LIMIT STRAP TO
PREVENT WHEEL
FROM HITTING
NACELLE BOTTOM
3MM CABLE FIT
TO TOP BOLT ASSY

TIE BUNGEE CHORD
TO GIVE BEST TENSION
FOR SUSPENSION

MW9B-24
NOSE WHEEL