

A

MIX RESIN AND
CHOP STRAND FG
BRUSH ALL OVER
PLY REINFORCING
AREA AND TUBES


25 DIA X 1,6
6082T6
TUBE

GUSSET ROUND
ALL UNSUPPORTED
AREAS


3 6MM HOLES
FOR FIN
ATTACHMENT
BOLTS

FIN ATTACHMENT
BOX


10MM SPRUCE
RIBLET



FIN BOX ATTACHMENT




3MM PACKER
STRIPS

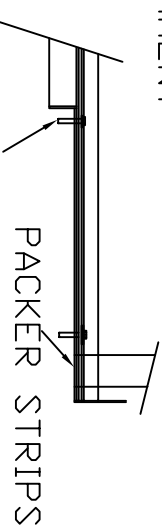

3 M6 BOLTS
TO ATTACH
FIN SECURE
WITH A WING NUT
AND SPRING CLIP


6MM BIRCH PLY
REINFORCINGS
ON FACE OF BOX

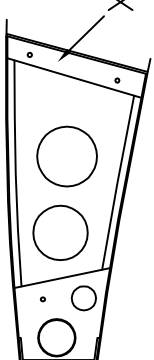


WIND ON 25MM FG TAPE
TO A DIA OF 58MM
LINE TURN TO GIVE
A LIGHT SLIDE FIT IN
WING SUPPORT TUBE




25MM HOLE
RIGHT THROUGH
PUSH FIT ON
SPAR TUBE




SPIGOT
37MM DIA X 1,6 6082T6



1,2MM ALLY DOOR
ATTACH TO FRONT FACE




ALLY HINGE
FIT A PUSH IN
DOOR LATCH
AT REAR

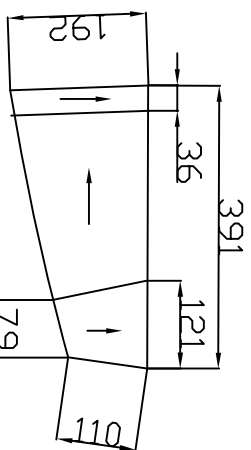

BACK PLATE
3MM OKDUME PLY

6MM PLY

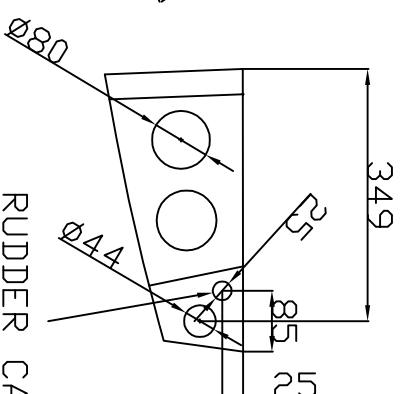

RUDDER CABLE
HOLE

MW9B-49
FIN ASSY 2