


A

RUN A STRIP OF
ANTI FRETTING
ADHESIVE TAPE
ROUND WING FAIRING
INTERFACE

3MM TINNEMAN
ST SCREW AND
TINNEMAN NUT





6MM BUNGEE HOLES
SWAGE IN A BRASS
ANTI FRETTING GROMMET

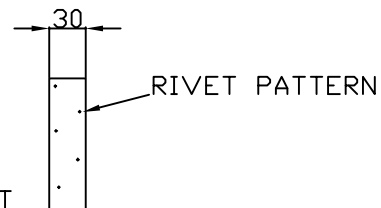

FORM BUNGEE HOOK
FROM 2MM ALUMINIUM
WELDING ROD
WIND ROUND 6MM ROD
AND BEND HOOK


LOCATE FITTING AND
ATTACH WITH CONTACT
ADHESIVE (EVO STICK)
DRILL AND RIVET TO SKIN

BUNGEEES 6 DIA
SECURE WITH A KNOT
LENGTH 40% SHORTER
THAN GAP
2 BUNGEEES/ BRKT

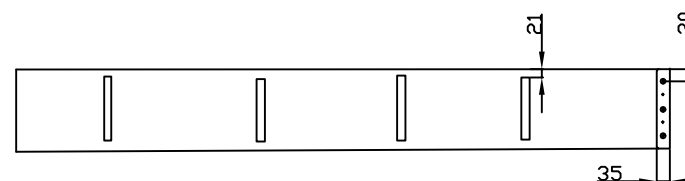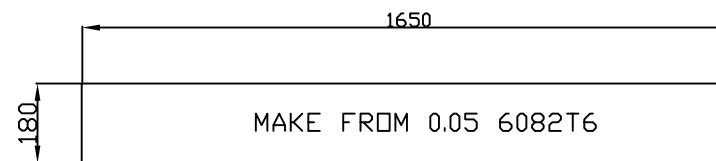

FRONT BUNGEE
IS FIXED

M5 BOLT INTO
AN M5 ANCHOR NUT

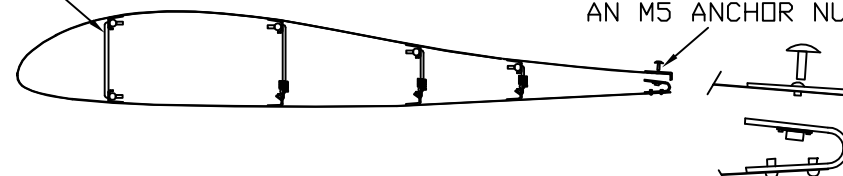

3,2 MM ALUMINIUM POP
RIVETS ALL FITTINGS

- ASSEMBLY INSTRUCTIONS
- 1 PASS FAIRING UNDER WING
 - 2 HOOK TE FITTING ON TE
 - 3 SLIDE FRONT ROUND LE
 - 4 HOOK UP BUNGEEES
 - 5 BOLT TE TOGETHER
 - 6 INSERT SCREW IN REAR SPAR BRKT

FITTINGS 1,2 6082T6
RIVET SKIN TOGETHER AT
A STIFFENER IF REQUIRED

FOR ADJUSTING TENSIONING OF FAIRING
WRAP TOUGH ADHESIVE TAPE ROUND LE
AS PACKING

MW9B-27
WING GAP FAIRINGS