



A

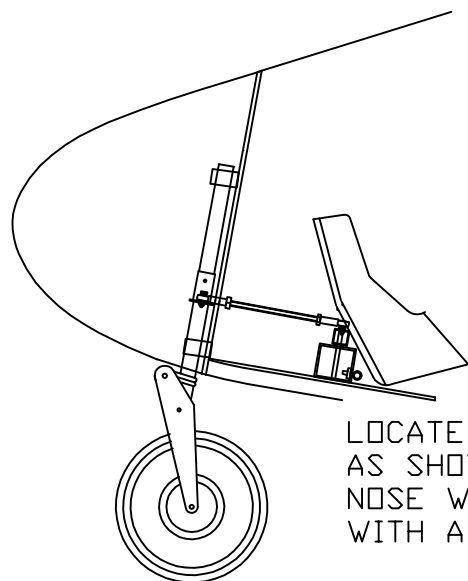


LOCATE STEERING BRKT
AS SHOWN DRILL 5MM THROUGH
NOSE WHEEL LEG AND FIX
WITH A 5MM BOLT

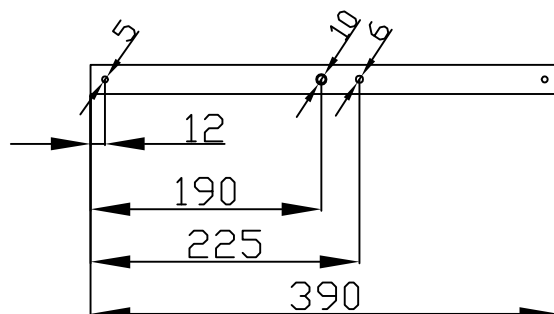


CASTLEATED NUT
AND SPLIT PIN

10X8MM MS PIVOT
TUBE BRAZE TO
RUDDER BAR

3/32 STEEL
RUDDER CABLE
SECURE WITH A
NICOPRESS SLEEVE

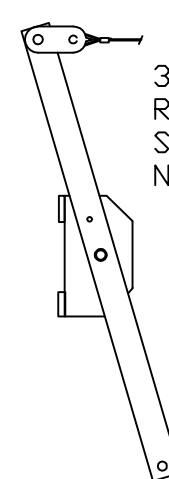


CASTLEATED NUT
& SPLIT PIN



5MM CSK BOLTS

FIT BOLT HD INTO PLY
SECURE WITH JB ADHESIVE

25X6MM ALLY 6082T6
STOP PLATES
6MM THICK
SPACER
M8 BOLT




FIT EYE BOLT
FOR TRIM SPRING


M6 BOLTS

RUDDER BAR PIVOT BRKT
50X50X3 6082T6 SQUARE TUBE

35DIAX1,6
MS TUBE




STEERING BRKT
MS WELD ARM
TO TUBE

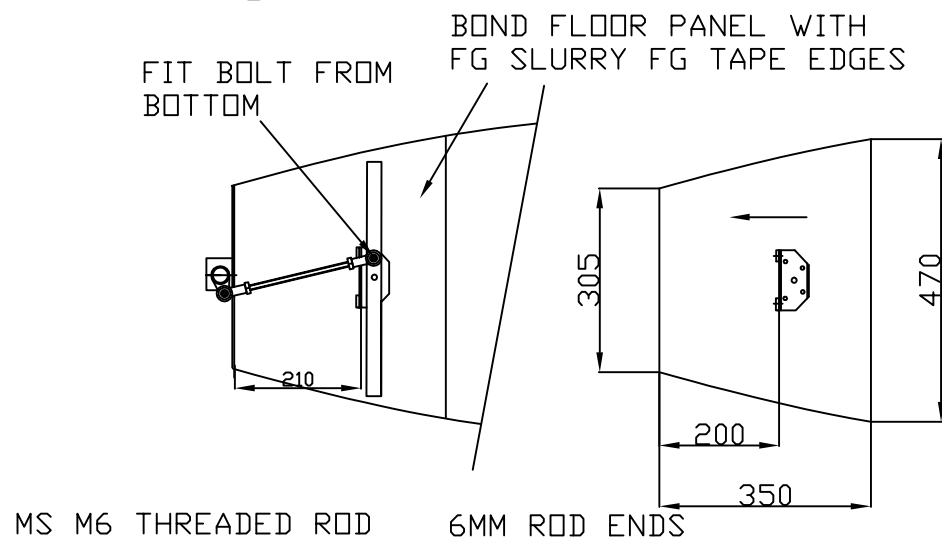


BOND FLOOR PANEL WITH
FG SLURRY FG TAPE EDGES

FIT BOLT FROM
BOTTOM

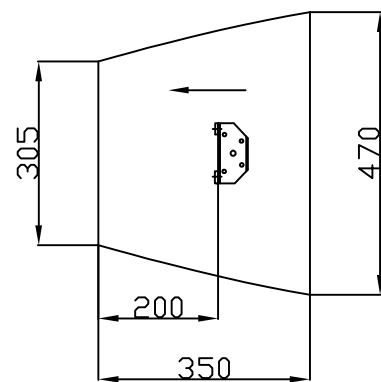

FLOOR PANEL
CHECK DIMS
ON ASSY
6MM BIRCH PLY

MS M6 THREADED ROD 6MM ROD ENDS



SET UP ON ASSY

MW9B-56
NOSE WHEEL STEERING